

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 972 537 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
19.01.2000 Bulletin 2000/03

(51) Int. Cl.<sup>7</sup>: A61M 25/02

(21) Application number: 99304724.0

(22) Date of filing: 17.06.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 18.06.1998 GB 9813056

(71) Applicant: Mogg, Alan David  
Ferndown, Dorset BH22 9HE (GB)

(72) Inventor: Mogg, Alan David  
Ferndown, Dorset BH22 9HE (GB)

(74) Representative:  
Lomas, Geoffrey Michael et al  
Barker, Brettell & Boutland  
Medina Chambers  
Town Quay  
Southampton, Hampshire SO14 2AQ (GB)

(54) Medical fixation device

(57) With reference to Figures 1 and 2 a fixation device (1) for attachment of a rigid item (2) of medical equipment to the skin (3) of a patient, comprises a structure (4) for flexibly supporting the item in close proximity to the skin (3).


The structure (4) is mountable, by means of a pad (5) of resilient foam plastics material and upper and lower layers (6, 7) of adhesive, to be releasably attached to the skin (3). The arrangement is such that the skin (3) can move, without substantial restriction, that is in a substantially normal manner, relative to the item (2).

The rigid item (2) of medical equipment comprises a biological filter, having flow ducts (9, 10).

The structure (4) (Figs 1 and 2) can be of hollow, cylindrical, form, of resilient material, such as rubber, and locates the filter (2) in its hollow interior (15), which is shaped to accommodate the filter (2) in a close-fitting relationship.

Alternatively, the structure (37) (Figs 13, 14) comprises a number of spaced-apart support legs or pillars (39) which are mounted on flexible feet (40a).

The adhesive of the layers (7) is of self-adhesive material. Release paper (16) with a release tab (16a) is provided to prevent adhesion by the layers (7) until the fixation device (1) is ready for mounting on the skin (3).

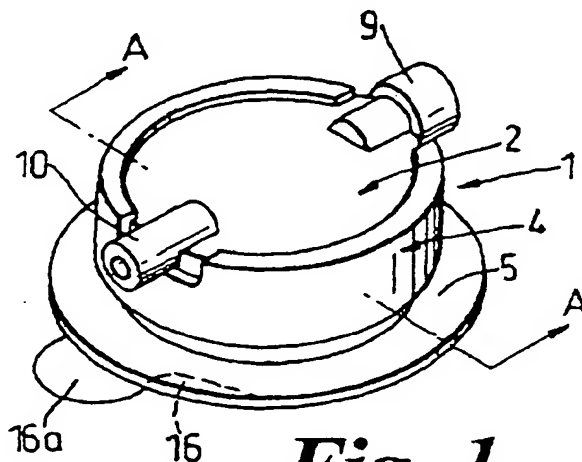

**Fig. 1**

EP 0 972 537 A2

## Description

[0001] This invention relates to a fixation device for the attachment of rigid or semi-rigid medical items of medical equipment to the skin of a patient.

[0002] In many medical treatments, there is a requirement to use items of medical equipment which, either through convenience or necessity, have to be attached to a patient's skin. One example of such equipment comprises a biological filter used with an epidural catheter, where the filter has to be attached to the patient in order to avoid the weight of the filter pulling the catheter from the patient.

[0003] Many of the medical items which require attachment, such as a biological filter, are rigid and hard and of a size that cannot be comfortably attached to the patient's skin. The general practice in this situation is for the medical device to be mounted on a soft pad of material, and then fixed with adhesive tape to the patient. These ad hoc methods of attachment are uncomfortable and unsightly and do not give very secure or consistent results.

[0004] Fixing rigid or semi-rigid items to the skin is difficult, because of the irregular, undulating and dynamic nature of the body's skin surface. Fixing these items directly to the skin, even by means of a thin sticky pad, can cause discomfort and/or restrict the free movement of the patient around the fixation site. Movement of the patient can also cause the means of attachment to become loose, by mechanical action working on the adhesive joint between the skin and device.

[0005] When attaching medical items to the skin three main issues affect the comfort of the patient. The first is the hardness or rigidity of the medical item. The second is the size of the medical item and the third being the natural characteristics of the patient's body at the site where the medical item is to be mounted.

[0006] The larger the medical item fixed to the skin the greater the restriction caused to the patient's body and the potential discomfort.

[0007] Also where the body has little fleshy cover but large amounts of joint articulation, muscle and tendon movement etc. then the attachment of the medical item also causes greater restriction and discomfort.

[0008] For the comfortable attachment of some semi-rigid or rigid medical items I consider that an attachment method requires a flexible element to dynamically isolate the patient's skin from the medical item, the degree of this flexibility being dependant on the rigidity and size of the medical item and the position it is to be mounted on the patient.

[0009] The biological filter used with an epidural catheter for example is made of a rigid material which can be 60 mm in diameter, and which is usually positioned on the front part of the patient's shoulder where the body has high levels of internal and skin activity. In this situation I consider that a flexible mounting method is necessary to allow the patient full movement without

discomfort.

[0010] According to the invention a fixation device for attachment of a rigid or semi-rigid item of medical equipment to the skin of a patient comprises a skin mounting means adapted to be secured to the skin in face contact therewith or by means of an adhesive layer, an item support structure carried by the skin mounting means and adapted to be secured to the medical equipment item, characterised in that the skin mounting means is connected to the item support structure by an upstanding spacer structure that defines, in use, a space between the skin on the one hand, and the item with item support structure on the other hand, and in that the spacer structure and/or the skin mounting means and/or the connection between the spacer structure and the item support structure is arranged to flex, in use, on flexure of the skin relative to the item.

[0011] Thus the item support structure and the item itself are held clear of the skin by the upstanding spacer structure, and a degree of flexibility is provided in the spacer structure, or in the skin mounting means, or in the connection of the spacer structure to the item support structure, to enable local flexing of the skin relative to the item, to accommodate body movement.

[0012] In one preferred embodiment the item support structure is integral with the item.

[0013] In another preferred embodiment, the spacer structure is of hollow cylindrical shape and formed of a resilient material to permit flexing of the cylindrical wall.

[0014] When a substantially cylindrical item is to be accommodated, the cylindrical spacer structure can be integral with a cylindrical housing for the item.

[0015] In other preferred embodiments, the spacer structure comprises a plurality of laterally spaced-apart support pillars.

[0016] In order to permit said flexing of the skin, the support pillars may be of resilient material.

[0017] Alternatively, the support pillars are relatively rigid and the skin mounting means is a respective foot carried by the lower end of the respective pillar, the foot being in the form of a membrane that can flex relative to the respective support pillars.

[0018] Advantageously, each foot then comprises a plurality of webs.

[0019] Flexibility may be provided by attaching each support pillar to the item support structure by an articulated connection.

[0020] Preferably, the item support structure is then provided with a plurality of radially disposed pins located by holes formed in the upper ends of the support pillars to provide the articulated connections.

[0021] The skin mounting means may be adapted to be attached to the skin of a patient by sutures.

[0022] Alternatively, the skin mounting means carries self-adhesive means for attaching it to the skin of a patient.

[0023] The minimum distance in use between the item support structure and an item, and flat areas of skin on

which the device is mounted, is preferably substantially in the range 5 to 10 mm.

[0024] When the item is circular in plan, said minimum distance is typically substantially one sixth of the diameter of the item.

[0025] Various embodiments of the invention will now be described by way of example only with reference to the accompanying drawings, wherein:-

Figure 1 is a view in perspective of a first fixation device,

Figure 2 is a view in section, taken on the lines A-A of Figure 1, of the device mounted on the skin of a patient,

Figure 3 is a view in perspective of a second fixation device,

Figure 4 is a view in section, taken on the lines B-B of Figure 3, showing this device mounted on a patient's skin,

Figure 5 is a view in perspective of a third fixation device,

Figure 6 is a view, partly in section, looking in the direction of arrow C of Figure 5, and showing this device mounted on a patient's skin,

Figure 7 is a view in perspective of a fourth fixation device, supporting a biological filter,

Figure 8 is a plan view thereof, with the biological filter removed,

Figure 9 is a view in section, taken on the lines E-E of Figure 8,

Figure 10 is a side view of a complete fourth fixation device, mounted on the skin of a patient,

Figure 11 is a view in section, taken on the lines F-F of Figure 10,

Figure 12 is a fragmentary side view, in section, taken on the lines D-D of Figure 8, with the device mounted on the skin of a patient,

Figure 13 is a fragmentary side view, in section, of a first modification of a device, mounted on the skin of a patient,

Figure 14 is a plan view, in section, taken on the lines G-G of Figure 13,

Figure 15 is a fragmentary side view, in section of a second modification, with the device mounted on

the skin of a patient,

Figure 16 is a side view of the second modification, taken on the lines H-H of Figure 15,

Figure 17 is a fragmentary side view, partly in section, which illustrates how a third modification is employed, the device being mounted on a patient's skin,

Figure 18 is a plan view, taken on the lines I-I of Figure 17,

Figure 19 is a fragmentary side view, partly in section, of a fourth modification, with the device mounted on a patient's skin,

Figure 20 is a plan view, taken on the lines J-J of Figure 19,

Figure 21 is a side view of a fifth fixation device, mounted on the skin of a patient,

Figure 22 is a plan view, in section, taken on the lines L-L of Figure 21,

Figure 23 is a side view of a sixth form of fixation device, mounted on the skin of a patient, and

Figure 24 is a plan view thereof looking in the direction of arrow M.

[0026] In the Figures, like features and components have like reference numerals.

[0027] With reference to Figures 1 and 2 a fixation device 1 for attachment of a rigid item 2 of medical equipment to the skin 3 of a patient, comprises a structure 4 for flexibly supporting the item with the base thereof in close proximity (say 6 mm to 8 mm) to the skin 3.

[0028] The structure 4 is mountable, by means of a pad 5 of resilient foam plastics material and upper and lower layers 6, 7 of adhesive, to be releasably attached to the skin 3. The arrangement is such that the skin 3 can move, without substantial restriction, that is in a substantially normal manner, relative to the item 2.

[0029] The rigid item 2 of medical equipment comprises a biological filter, having flow ducts 9, 10.

[0030] The structure 4, which is of hollow, cylindrical form, is of resilient material, such as rubber, and locates the filter 2 in its hollow interior 15, which is shaped to accommodate the filter 2 in a close-fitting relationship.

[0031] The adhesive of the layers 7 is of self-adhesive material. Release paper 16 with a release tab 16a is provided to prevent adhesion by the layers 7 until the fixation device 1 is ready for mounting on the skin 3.

[0032] In use, the lower portion of the hollow, cylindrical structure 4 of the device 1 constitutes a spacer

structure that can flex so that the skin 3 on which the device 1 is mounted can move, without inflicting discomfort to the patient, relative to the filter 2.

[0033] In the device 20 illustrated by Figures 3 and 4, a modified resilient structure 4a is substituted. The structure 4a is formed with holes 21 in an external flange 22 of the structure 4a whereby the structure 4a is attachable to the skin 3 by sutures. In addition, an adhesive bond 23 is provided between an internal flange 24 of the structure 4a and the item 2.

[0034] The modification dispenses with the pad 5 and associated adhesive layers of Figure 2, allowing direct attachment of the device 20 to the skin 3.

[0035] A space 15a is defined between the base of the item 2 and the skin 3.

[0036] In the device 25 of Figures 5 and 6, the structure 4b comprises an upper, filter support portion 26 disposed above and connected to, a support plate 27, by resilient legs or pillars 28. A body comprising a pad 29 of resilient foam plastics material is disposed between the plate 27 and skin 3. Adhesive layers are disposed between the pad 29 and the skin 3, as well as between the pad 29 and the plate 27 (as in Figure 2). The item 2 is bonded to the support 26 by an adhesive layer 30.

[0037] In the device 35 of Figures 7, 8 and 9, the filter 2 is releasably held in place by an annular cage-like structure 36 of plastics material, having equi-spaced, finger-like spring clips 36 which resiliently secure the filter 2 in place on a support ring 37.

[0038] The ring 37 is flexibly supported above a body comprising a pad 41 of resilient foam plastics material, by way of three equi-spaced, legs or pillars 39 (Figure 12), of plastics material. The pillars 39 extend downwardly between the support ring 37 and thin (eg 0.2 mm) membranes 40 of plastics material disposed on the upper surface of the pad 41, which is of resilient foam plastics material.

[0039] The membranes 40 and pillars 39 each comprise an integral moulding. As shown in Figure 10, the membranes 40, which provide support feet, each have slots 45 to assist moulding, and thin vein-like webs 46 distributed over the membranes so as to improve flow of the plastics material to the membranes, when moulding takes place.

[0040] Adhesive material is disposed between the under surfaces of the membranes 40 and the upper surface of the pad 41. Also between the lower surface of the pad 41 and the skin 2 (as in Figure 2).

[0041] The pillars 39 and membranes or feet 40 are integral with the support ring 37.

[0042] When the device 35 is in use, mounted on the skin 3, the skin can move, without inflicting discomfort to the patient, relative to the item 2 and support structures 36, 37 and 39. The three legs or pillars 39 provide tripod-like support and the thin membranes or feet 40, being flexible, allow this relative movement. Additional flexibility is provided by the resilient pad 41.

[0043] With reference to Figures 13 and 14, feet or

membranes 40a may be used, wherein their lower surfaces are formed with shallow (circular) recesses 50. The webs 46a shown in Figure 14 do not extend over such a large area as webs 46 of Figure 11, but are local to the associated pillars 39. A membrane 40a is preferably more rigid than a membrane 40 of Figure 11, but flexibility is provided by resilience of the webs 46a. The webs 46a, unlike webs 46, do not have plastic material between them.

[0044] Figures 15 and 16 illustrate the use of three equi-spaced legs 55 of articulated form, disposed in a ring and supported by a pad 41 of foam plastics material. The legs 55, which carry a support ring 56 of plastics material, (similar in form to support ring 37 of Figure 13), are bonded to the pad 41 by adhesive 57. The legs 55 have circular feet 61.

[0045] The ring 56 has a plurality of radially-disposed, inwardly-projecting pins 58. Each pin 58, which is of waisted form, is located by a hole 59 formed in each leg 55. Slots 60 allow the ring 56 to be retained in place, after an initial clip-on. By reason of the clearance between each hole 59 and the waisted portion of its associated pin 58, the arrangement provides articulated connections between the ring 56 and its support legs 55, allowing angular freedom of the feet 61.

[0046] Figures 17 and 18 illustrate another articulated connection, employed here, between legs 65 and an item 66 of medical equipment, such as a filter. The item 66 has a plurality of radially-disposed equi-spaced outwardly projecting pins 67 of waisted form, integral with the item 66 and located in an articulated manner, by holes 68 formed in the upper ends of the legs 65. The legs 65 have circular feet 69, which are perforated by suture holes 70, whereby the legs 65 are secured to the skin 3 of a patient.

[0047] Figures 19 and 20 show a modification employing a spacer structure in the form of a plurality of support legs or struts 75 which are integral with a medical item 76, comprising a biological filter. The modification also makes use of thin membranes 77, substantially identical to membranes 40 of Figure 11, and integral with the struts 75. The membranes 70 are bonded to a pad 78 of foamed plastics material, by layers 79 of adhesive.

[0048] With reference to Figures 21 and 22, a fixation device 92 has an elongate biological filter 85, bonded at 86 to a filter support structure 87 supported by a pair of integral struts 89, above a pad 90 of foamed plastics material. The struts 89 employ integral membranes 91, substantially identical to membranes 40 of Figure 11.

[0049] The device 92 is secured to the skin 3 of patient by a layer 93 of self-adhesive. A release tag 16a is provided, so as to allow removal of release paper (not shown), prior to application of the device 92 to the patient's skin 3.

[0050] Figures 23 and 24 together illustrate a fixation device 100 for attachment of an item 101 of medical equipment, namely a flexible tube, to the skin 3 of a

patient. The device 101 employs support structure in the form of a U-shaped spring clip 102, resiliently attached to a pad 103 of foamed plastics material by a two-piece membrane 104, each piece 104a of the membrane 104 being of substantially semi-circular form.


[0051] The membrane 104 and spring clip 102 comprise an integral component of plastics material. The pad 103 is secured to the skin 3 by a layer 105 of self-adhesive and the membrane 104 is bonded to the pad 103 by a layer 106 of adhesive. A release tag 16a is provided, so as to permit removal of release paper (not shown) prior to application of the device 100 to the patient's skin.

[0052] Where practicable and where desirable, features disclosed herein may be substituted for, or added to other such features.


[0053] Thus, for example, where a device has been described as attachable to a patient's skin by means of sutures, it may instead be attachable by self-adhesive material, or a combination of sutures and such material.

### Claims


1. A fixation device for attachment of a rigid or semi-rigid item of medical equipment to the skin of a patient comprising a skin mounting means adapted to be secured to the skin in face contact therewith or by means of an adhesive layer, an item support structure carried by the skin mounting means and being secured to or adapted to be secured to the medical equipment item, characterised in that the skin mounting means (22; 27; 40; 40a; 61; 70; 77; 91; 104) is connected to the item support structure by an upstanding spacer structure (4a; 28; 39; 55; 65; 75; 89) that defines, in use, a space (15a) between the skin (3) on the one hand and the item (2; 76; 85; 101) with item support structure (4; 36; 37; 102) on the other hand, and in that the spacer structure and/or the skin mounting means and/or the connection between the spacer structure and the item support structure is arranged to flex, in use, on flexure of the skin relative to the item.
2. A device as claimed in claim 1, characterised in that the spacer structure (4; 4a) is of hollow cylindrical shape and formed of a resilient material to permit flexing of the cylindrical wall.
3. A device as claimed in claim 1, characterised in that the item support structure is integral with the item (76).
4. A device as claimed in claim 1 or claim 3 characterised in that the spacer structure comprises a plurality of laterally spaced-apart support pillars (28; 39; 55; 65; 75; 89).
5. A device as claimed in claim 4, characterised in that the support pillars (28) are of resilient material.
6. A device as claimed in claim 4, characterised in that the support pillars (39; 75; 89) are relatively rigid and the skin mounting means is a respective foot carried by the lower end of the respective pillar, the foot being in the form of a membrane (40; 40a; 77; 91) that can flex relative to the respective support pillars.
7. A device as claimed in claim 6, characterised in that each foot comprises a plurality of webs.
8. A device as claimed in claim 4 characterised in that each support pillar (55; 65) is attached to the item support structure (56; 66) by an articulated connection (58, 59; 67, 68).
9. A device as claimed in claim 8, wherein the item support structure is provided with a plurality of radially disposed pins (58; 67) located by holes (59; 68) formed in the upper ends of the support pillars (55; 65) to provide the articulated connections.
10. A device as claimed in any one of claims 4 to 7, wherein the item support and its support pillars comprise an integral moulding of plastics material.
11. A device as claimed in any one of the preceding claims, wherein the item comprises a tube of plastics material.
12. A device as claimed in any of the preceding claims characterised in that the skin mounting means is adapted (at 21) to be attached to the skin (3) of a patient by sutures.
13. A device as claimed in any of claims 1 to 11 characterised in that the skin mounting means carries self-adhesive means (7) for attaching the skin mounting means to the skin of a patient.
14. A device as claimed in any of the preceding claims characterised in that the minimum distance in use between the item support structure and item, and a flat area of skin on which the device is mounted, is substantially in the range 5 to 10 mm.

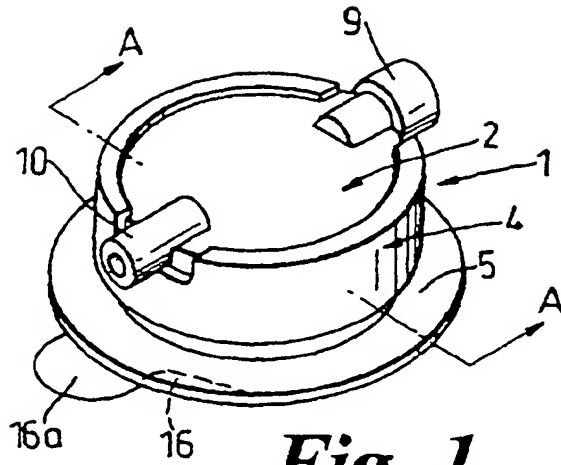


**Fig. 1**

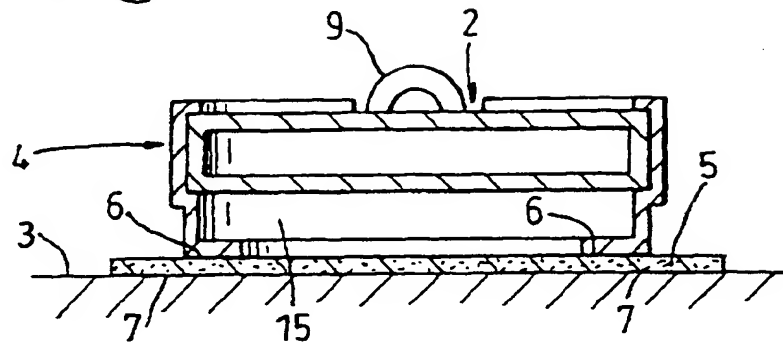


**Fig. 2**

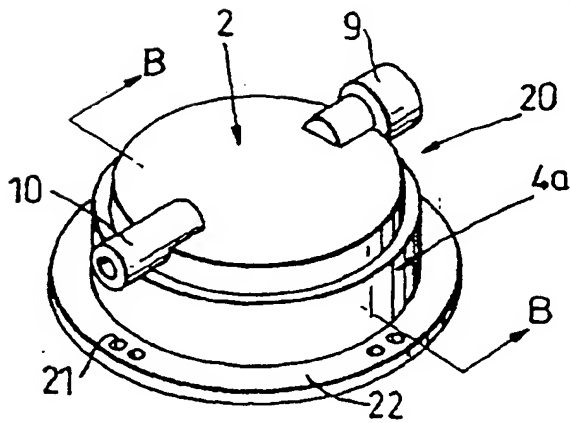


**Fig. 3**

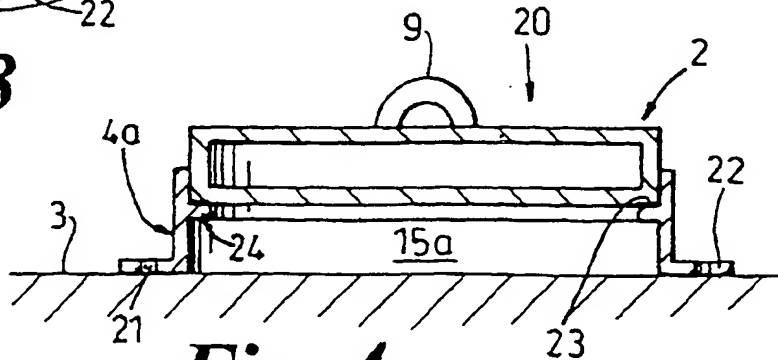


**Fig. 4**

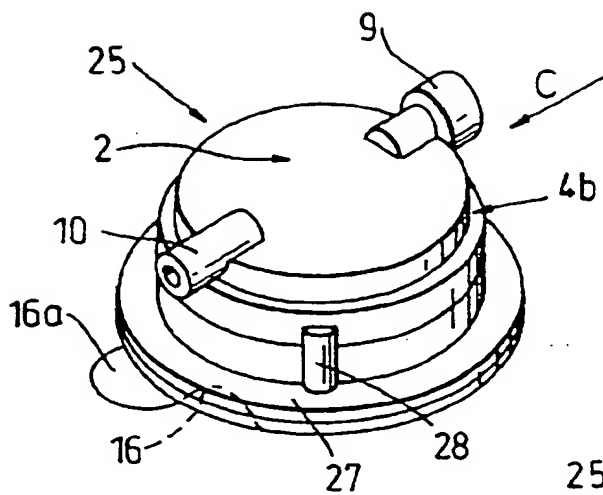


**Fig. 5**

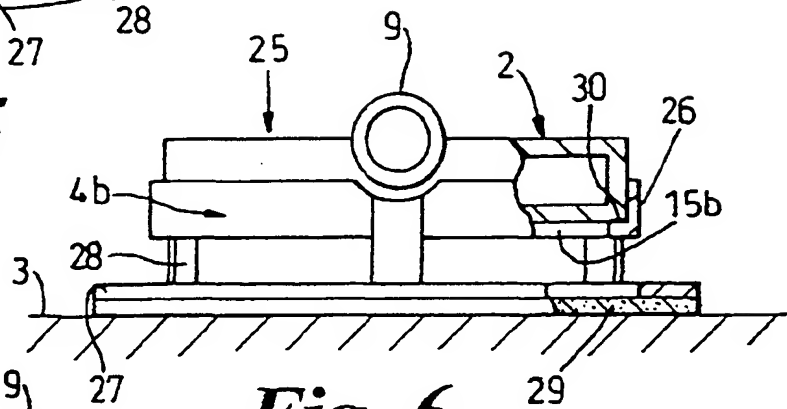


**Fig. 6**

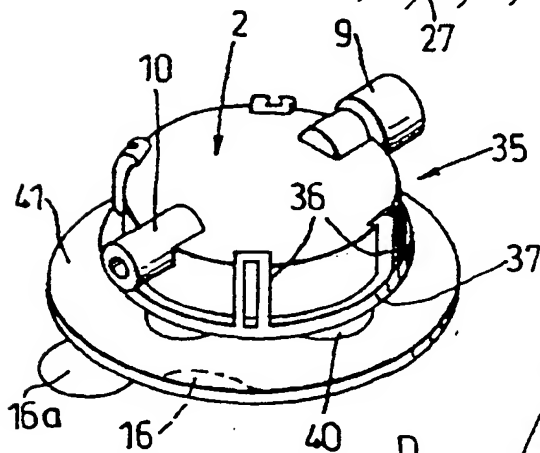


**Fig. 7**




**Fig. 9**

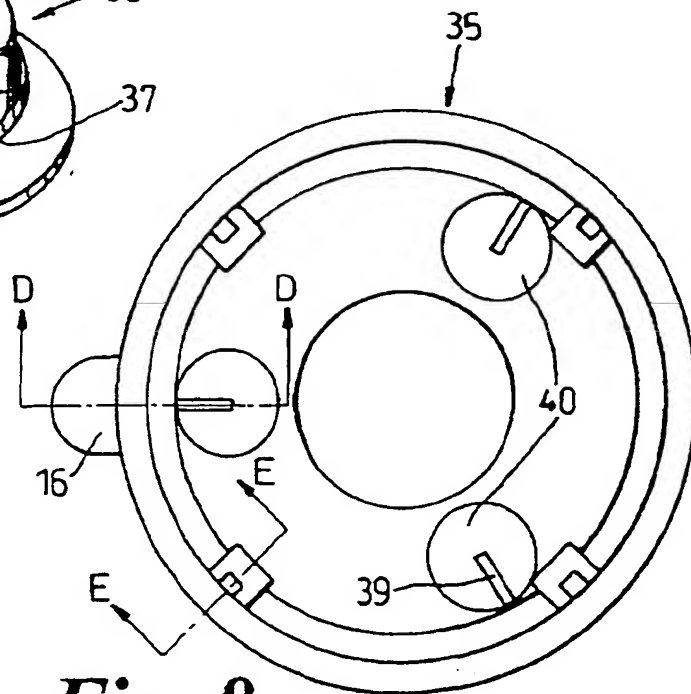


**Fig. 8**

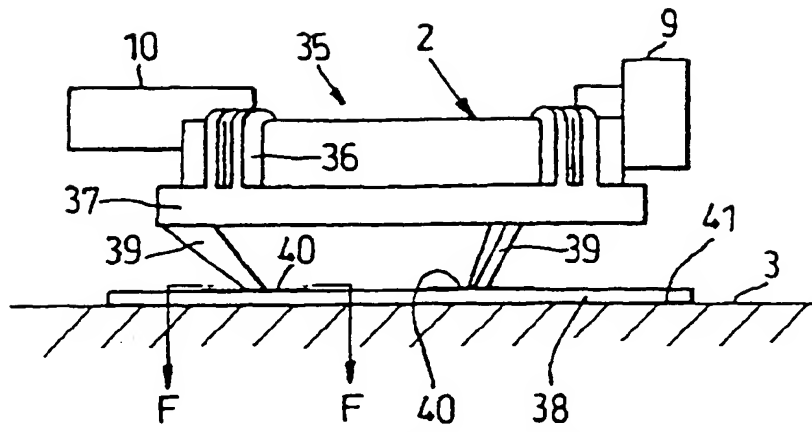


**Fig. 10**




**Fig. 11**

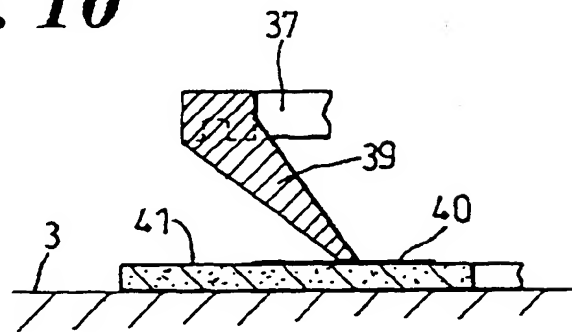

**Fig. 12**

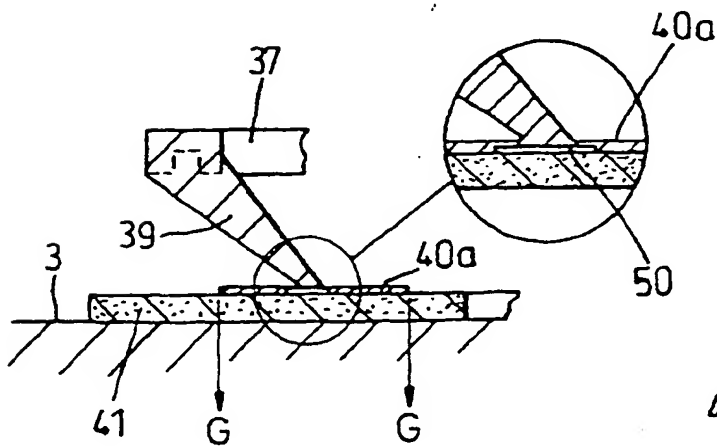


**Fig. 13**

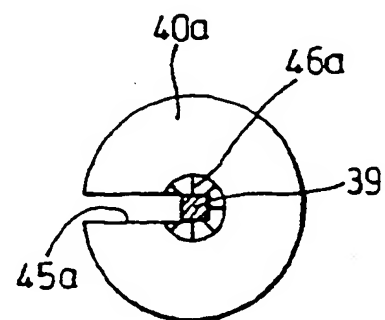


**Fig. 14**




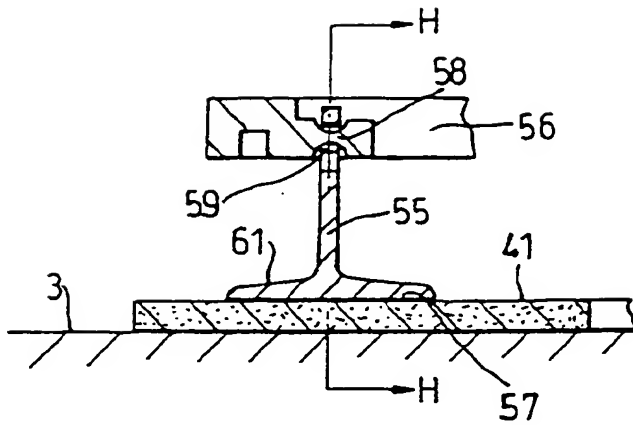


**Fig. 15**

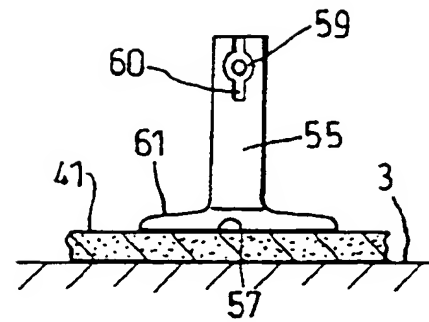


**Fig. 16**

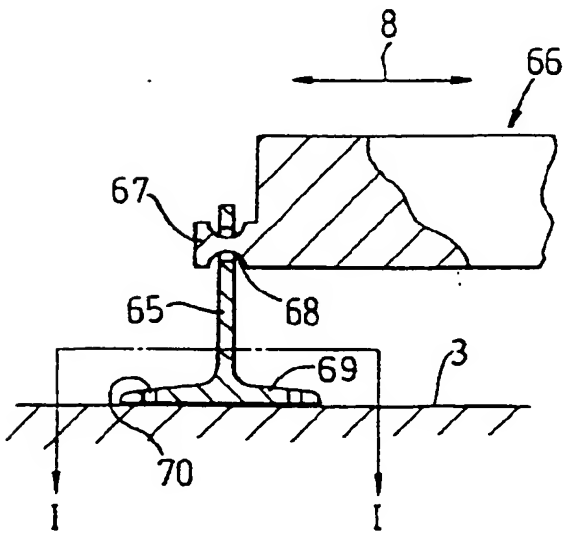


**Fig. 17**

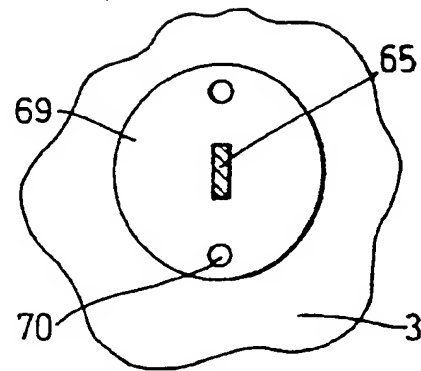


**Fig. 18**

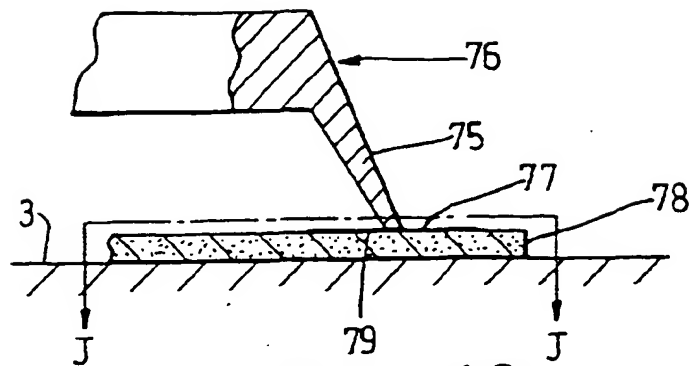


**Fig. 19**

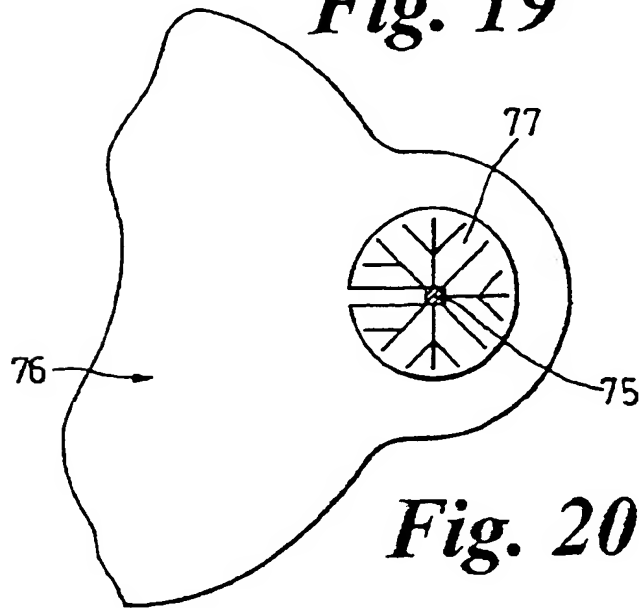


**Fig. 20**

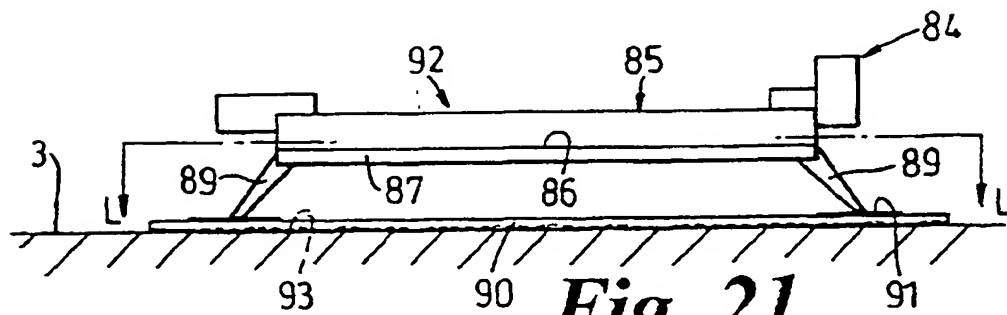


**Fig. 21**

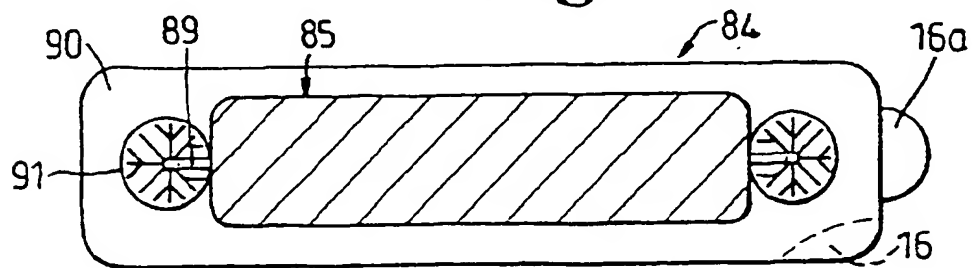

**Fig. 22**

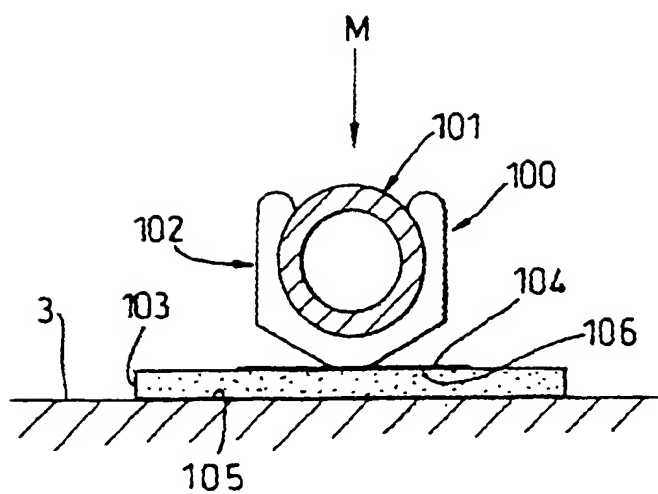

**Fig. 23**

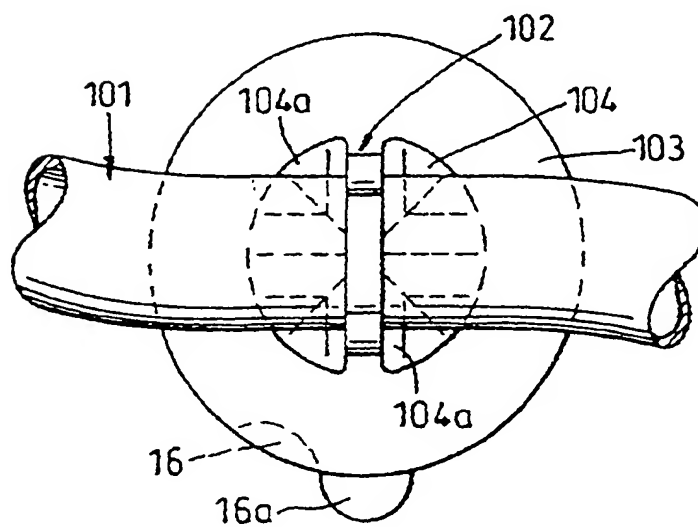

**Fig. 24**

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 972 537 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
05.04.2000 Bulletin 2000/14

(51) Int. Cl.<sup>7</sup>: A61M 25/02

(43) Date of publication A2:  
19.01.2000 Bulletin 2000/03

(21) Application number: 99304724.0

(22) Date of filing: 17.06.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Mogg, Alan David  
Ferndown, Dorset BH22 9HE (GB)

(30) Priority: 18.06.1998 GB 9813056

(74) Representative:  
Lomas, Geoffrey Michael et al  
Barker, Brettell & Boutland  
Medina Chambers  
Town Quay  
Southampton, Hampshire SO14 2AQ (GB)

(71) Applicant: Mogg, Alan David  
Ferndown, Dorset BH22 9HE (GB)

## (54) Medical fixation device

(57) A fixation device for attachment of a rigid item of medical equipment to the skin of a patient, comprises a structure for flexibly supporting the item in close proximity to the skin.


The structure is mountable, by means of a pad of resilient foam plastics material and upper and lower layers of adhesive, to be releasably attached to the skin. The arrangement is such that the skin can move, without substantial restriction, that is in a substantially normal manner, relative to the item.

The rigid item of medical equipment comprises a biological filter, having flow ducts.

The structure can be of hollow, cylindrical form, of resilient material, such as rubber, and locates the filter in its hollow interior, which is shaped to accommodate the filter in a close-fitting relationship.

Alternatively, the structure comprises a number of spaced-apart support legs or pillars which are mounted on flexible feet.

The adhesive of the layers is of self-adhesive material. Release paper with a release tab is provided to prevent adhesion by the layers until the fixation device is ready for mounting on the skin.

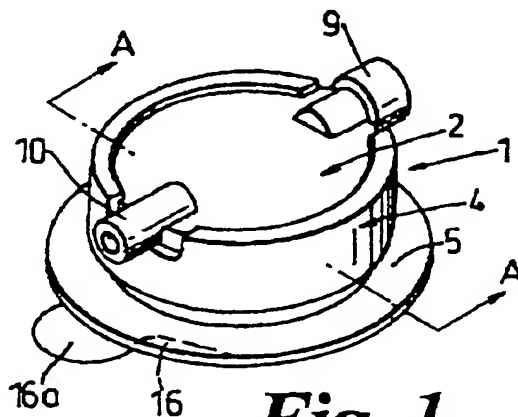**Fig. 1**

EP 0 972 537 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 4724

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	DE 44 34 262 A (BERNHARDT WILLI L DIPL ING ;KNOELL KRISTIAN (DE)) 23 March 1995 (1995-03-23) * the whole document *	1,4,5, 10,11,13	A61M25/02
X	US 4 606 735 A (WILDER JOSEPH R ET AL) 19 August 1986 (1986-08-19) * the whole document *	1,3,11, 13	
X	US 3 702 612 A (SCHLESINGER ROBERT M) 14 November 1972 (1972-11-14) * the whole document *	1,11,13	
A		2	
X	US 5 137 519 A (VAN DUSEN WENDY G ET AL) 11 August 1992 (1992-08-11) * the whole document *	1,11,13	
X	US 5 188 609 A (BAYLESS BRIAN ET AL) 23 February 1993 (1993-02-23) * the whole document *	1,13	
A		2	
X	US 4 769 010 A (YOUNG THOMAS M ET AL) 6 September 1988 (1988-09-06) * the whole document *	1,13	TECHNICAL FIELDS SEARCHED (Int.Cl.6) A61M
X	US 3 794 032 A (DEROUINEAU R) 26 February 1974 (1974-02-26) * the whole document *	1	
A	US 3 782 388 A (PAGE S) 1 January 1974 (1974-01-01) * the whole document *	1	
A	US 5 352 211 A (MERSKELLY WILLIAM L) 4 October 1994 (1994-10-04) * abstract; figure 1 *	1	
		-/--	
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 4 February 2000	Examiner Jameson, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>&amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P4/C01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 4724

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InLCL6)
A	EP 0 807 450 A (REDMOND ANTHONY DAMIEN) 19 November 1997 (1997-11-19) * abstract; figure 2 * -----	1	
			TECHNICAL FIELDS SEARCHED (InLCL6)
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 4 February 2000	Examiner Jameson, P
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  .....  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04C01)

# ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 99 30 4724

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-02-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 4434262 A	23-03-1995	NONE	
US 4606735 A	19-08-1986	NONE	
US 3702612 A	14-11-1972	NONE	
US 5137519 A	11-08-1992	NONE	
US 5188609 A	23-02-1993	NONE	
US 4769010 A	06-09-1988	NONE	
US 3794032 A	26-02-1974	NONE	
US 3782388 A	01-01-1974	NONE	
US 5352211 A	04-10-1994	US 5540237 A	30-07-1996
EP 0807450 A	19-11-1997	GB 2313315 A,B	26-11-1997

EPO FORM P0458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82